

Utensil Washer - Model 9210



Specification Data

JEROS 9210 - Utensil Washer

Build for the Future. Shaped by Customer Experience.

The machine is not just our new generation of industrial utensil washers. It is the result of many years of close dialogue with you - our customers and dealers, and it has been developed with a view to both current and future needs in the food industry, as well as in fast food and the restaurant sector.

We have improved every single detail to enhance user-friendliness, raise hygiene standards, and make cleaning the machine itself much more manageable. From the impact-resistant lid and the intuitive user interface to the possibility of cloud integration and remote support, the machine delivers stable operation and documented hygiene in a compact and robust solution.

The Model 9210 is built to make a difference. Here are some highlights of the machine:

- **Double-Insulated Stainless Steel Hood with Inspection Window.**
The impact-resistant and double-insulated lid reduces heat loss and minimizes energy consumption.
- **Glass-Blasted Surfaces and New Wash Chamber.** All surfaces are glass-blasted, providing a smooth and sealed surface that is easy to clean.
- **New User-Friendly Controller-interface in Local Language** with automatic datalogging and cloud-ready, so all data on water and energy consumption, temperature profiles and errors are automatically logged.
- **The Unique, well known JEROS® lid construction**, which ensures optimum ergonomics and capacity in a minimum of space, has been developed in the new series.

Optional Extras


- A = Automatic soap dosage
B = Integrated mixing tap
C = End-rinse pump (included)
D = Rinse hose
I = Isolated lid, wash & rinsetank (included)
S = Steam Converter
W = Wheels, machine mounted on
E = Integrated shower tap
XH = Extra wash height +230mm
T = Steam connection wash tank

General Data

Wash Tank – 51ltrs	Wash Time (min) – 3+3+6
Rinse Tank – 11ltrs	Wash Pressure – 1.2 Bar
Water Consumption per wash – 4ltrs	Rinse Pressure – 1.1 Bar
Wash Pump capacity – 600ltrs	Wash Pump – 1.4Kw
Wash Temp – 58°C	Current Rating – 16 Amp
Rinse Temp – 85°C	Connection – 6.5Kw

Dimensions





Wash Area - W x H x D mm	690 x 590 x 635
Machine – H1 x H2 x W x D	2100 x 1631 x 840 x 855



JEROS A/S
Nyborgvej 8
5750 Ringe - Denmark

Phone: + 45 63 62 39 13
Email: jeros@jeros.com
Web: www.jeros.com

Installation Guide - Model 9210

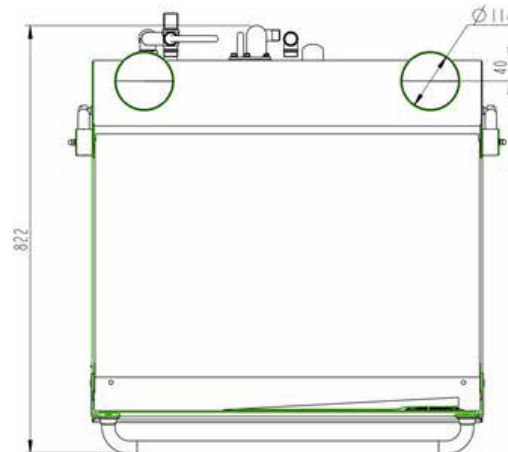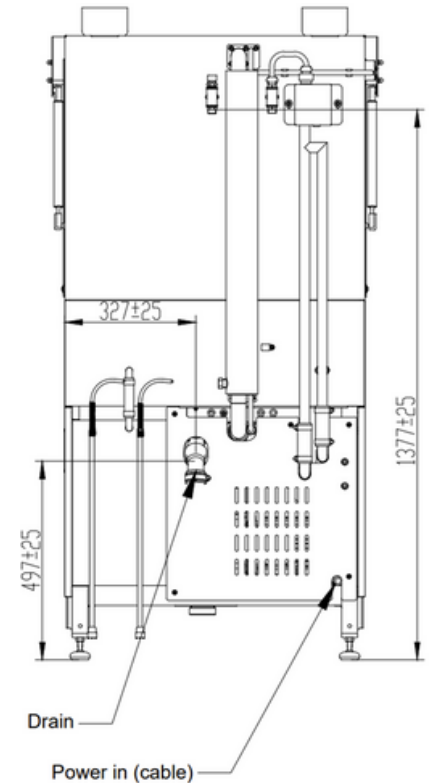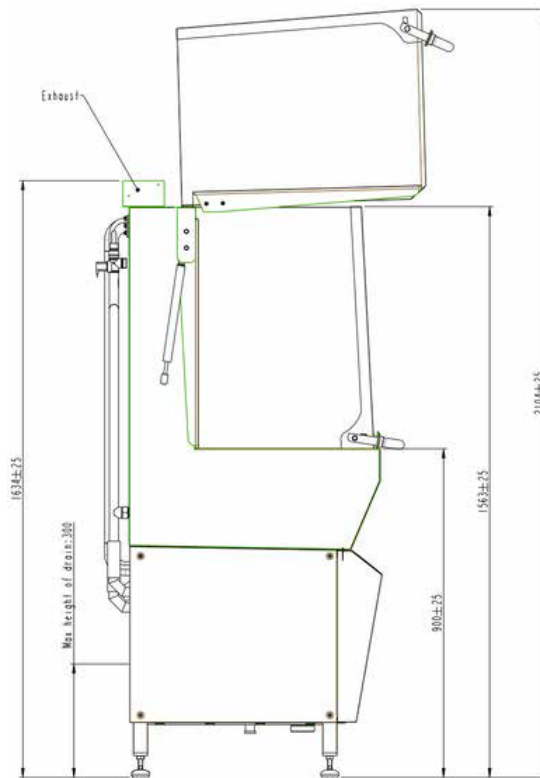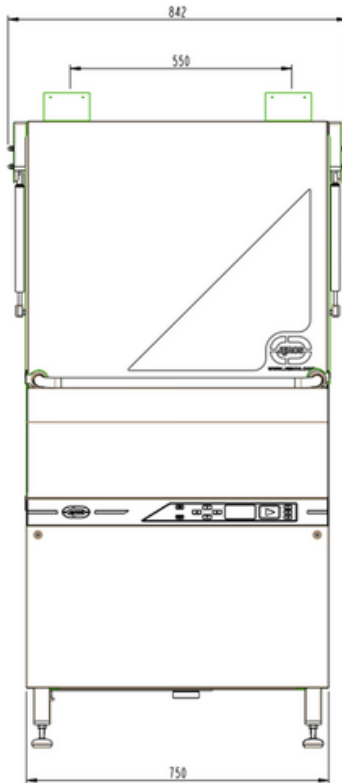

Installation		Capacity	
Voltage Standard	3N~400V + PE 50Hz	Euronorm crates 400 x 600	1
Max. power/main fuses	6.5kW/16A	Plates 600 x 400	15
Heat Elements	1 x 2.0 kW + 1x4.5 kW	Plates 600 x 460	15
Power cable (standard)	5 x 2.5" x 2500mm	Plates 600 x 800	-
Water connection, dimension	1/2" RG	Gastronomy tray 500 x 500	1
Water connection, pressure	1.5 - 6 dyn bar	60 L - Bowl H 511 x ø 575	1
Water connection, temperature	Ca. 56°	80 L - Bowl H 515 x ø 645	-
Drain dimension	40mm diameter		
Recommended exhaust capacity	180 m3/h		

